THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-11-015983	02AUG2011	JC	AZ

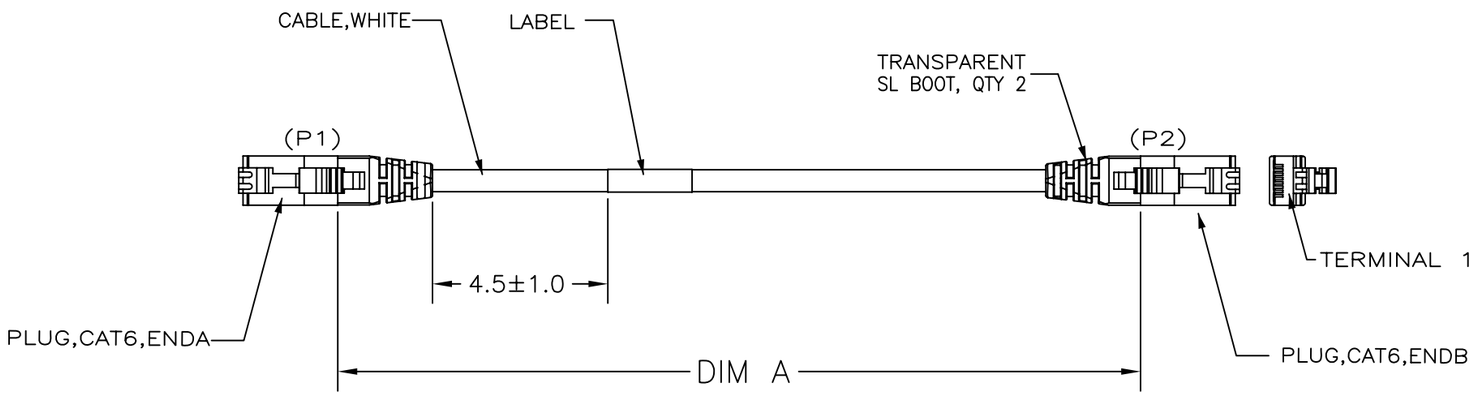

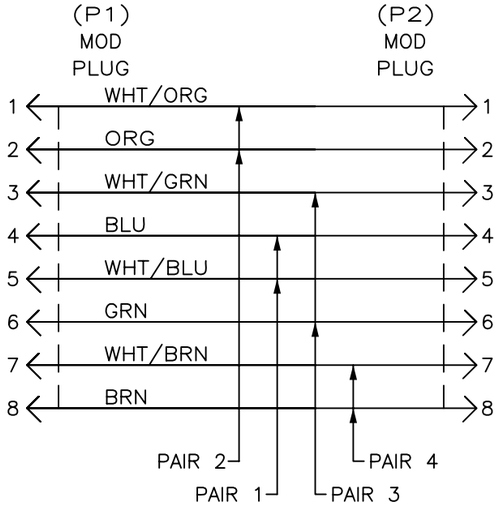

WIRING DIAGRAM △5
T568B

1. ONE CABLE ASSEMBLY PACKAGED IN A POLY BAG.
2. CABLE: UNSHIELDED, 24AWG, 4 TWISTED PAIRS 7/32 STRANDED CONDUCTORS, 100 OHMS.
3. △3 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
4. DESIGNATIONS IN PARENTHESES ( ) ARE FOR REFERENCE ONLY.
5. △5 WIRES TO BE LACED IN MOD PLUG PER COLOR CODE IN WIRING DIAGRAM. FINAL ASSEMBLY WILL BE T568B.
6. △6 USE SL BOOT 1859146-2 AND CM9614-000 LABEL FOR UL APPROVED CABLE ASSEMBLIES.

PART NO	DIM A	FEET,REF
9-1859250-9	1200-1206	100
9-1859250-5	1140-1146	95
9-1859250-0	1080-1086	90
8-1859250-5	1020-1026	85
8-1859250-0	960-966	80
7-1859250-5	900-906	75
7-1859250-0	840-846	70
6-1859250-5	780-786	65
6-1859250-0	720-726	60
5-1859250-5	660-666	55
5-1859250-0	600-606	50
4-1859250-5	540-546	45
4-1859250-0	480-486	40
3-1859250-5	420-426	35
3-1859250-3	396-402	33
3-1859250-0	360-366	30
2-1859250-5	300-304	25
2-1859250-0	240-244	20
1-1859250-7	204-208	17
1-1859250-6	192-196	16
1-1859250-5	180-184	15
1-1859250-2	144-148	12
1-1859250-0	120-124	10
1859250-9	108-110	9
1859250-8	96-98	8
1859250-7	84-86	7
1859250-6	72-74	6
1859250-5	60-62	5
1859250-4	48-50	4
1859250-3	36-38	3
1859250-2	24-26	2
1859250-1	12-14	1

1859250

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN JESSIE CHEN 02AUG2011
CHK RICKY CHEN 02AUG2011
APVD ADAM ZHU 02AUG2011
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME CABLE ASSY, CAT6, MOD PLUG, 8 POSN, WHITE, TRANSPARENT SL BOOT
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1859250	–

CUSTOMER DRAWING | SCALE – | SHEET 1 OF 1 | REV D